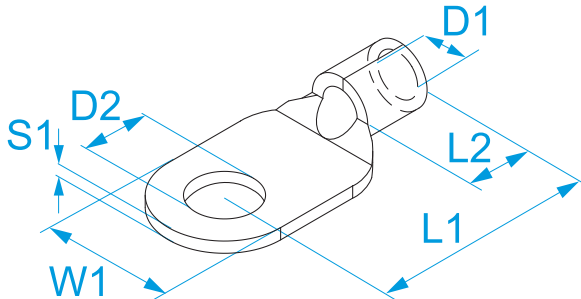


		Specyfikacja techniczna				No. 11TA02A							
						Wersja V01.2							
Rodzina produktów:		Końcówki - Końcówki kablowe wg normy DIN											
Kod towaru:		02425, 02431, 02437, 02443, 02449, 02525, 02531, 02537, 02543, 02549, 02561, 02631, 02637, 02643, 02649, 02655, 02661, 02731, 02737, 02743, 02749, 02755, 02761, 02837, 02843, 02849, 02855, 02861, 02937, 02943, 02949, 02955, 04137, 04143, 04149, 04155, 04161, 04243, 04249, 04255, 04261, 04267, 04343, 04349, 04361											
Opis:		KOŃCÓWKI KABLOWE DO PRZEWODÓW MIEDZIANYCH · NIEIZOLOWANE · OCZKOWE · LUTOWANE STOPEM SREBRA											
Obraz		Obrazy wymiary											
													
Dane techniczne													
MATERIAŁ KOŃCÓWKI:		miedź cynowana											
SPOINA:		lut srebrny											
TEMPERATURA ROBOCZA:		od -50 °C do +150 °C											
NORMA ODNIESIENIA:		DIN 46234											
Kod	Rozdział (mm²)	Rozdział (AWG/kcmil)	Do śruby Ø śruby (mm)	Do śruby Rozmiar szpilki	Nr sześciokąta matrycy	W1 (mm)	L1 (mm)	L2 (mm)	D1 (mm)	D2 (mm)	S1 (mm)		
02425	10	(8)	5	#10	6	10	16	8	4,5	5,3	1,1	100/500	
02431	10	(8)	6	#12	6	11	17	8	4,5	6,4	1,1	100/100	
02437	10	(8)	8	5/16"	6	14	20	8	4,5	8,4	1,1		
02443	10	(8)	10	3/8"	6	18	21	8	4,5	10,5	1,1		
02449	10	(8)	12	1/2"	6	22	23	8	4,5	13	1,1		
02525	16	(6)	5	#10	8	11	20	10	5,8	5,3	1,2	100/500	
02531	16	(6)	6	#12	8	11	20	10	5,8	6,4	1,2	100/100	
02537	16	(6)	8	5/16"	8	14	22	10	5,8	8,4	1,2		
02543	16	(6)	10	3/8"	8	18	24	10	5,8	10,5	1,2		
02549	16	(6)	12	1/2"	8	22	26	10	5,8	13	1,2		
02561	16	(6)	16	5/8"	8	32	36	10	5,8	17	1,2		
02631	25	(4)	6	#12	10	12	25	11	7,5	6,4	1,5		
02637	25	(4)	8	5/16"	10	16	25	11	7,5	8,4	1,5		
02643	25	(4)	10	3/8"	10	18	26	11	7,5	10,5	1,5		
02649	25	(4)	12	1/2"	10	22	31	11	7,5	13	1,5		
02655	25	(4)	14	9/16"	10	30	37	11	7,5	15	1,5		
02661	25	(4)	16	5/8"	10	28	35	11	7,5	17	1,5		
02731	35	(2)	6	#12	12	15	26	12	9	6,5	1,6		
02737	35	(2)	8	5/16"	12	16	26	12	9	8,4	1,7		
02743	35	(2)	10	3/8"	12	18	27	12	9	10,5	1,7		
02749	35	(2)	12	1/2"	12	22	31	12	9	13	1,7		
02755	35	(2)	14	9/16"	12	28	36	12	9	15	1,7		
02761	35	(2)	16	5/8"	12	28	36	12	9	17	1,7		
02837	50	(1/0)	8	5/16"	14	18	34	16	11	8,4	1,8	100/100	
02843	50	(1/0)	10	3/8"	14	18	34	16	11	10,5	1,8		
02849	50	(1/0)	12	1/2"	14	22	36	16	11	13	1,8		
02855	50	(1/0)	14	9/16"	14	28	40	16	11	15	1,8		
02861	50	(1/0)	16	5/8"	14	28	40	16	11	17	1,8		
02937	70	(2/0)	8	5/16"	16	22	38	18	13	8,4	2		
02943	70	(2/0)	10	3/8"	16	22	38	18	13	10,5	2		
02949	70	(2/0)	12	1/2"	16	22	38	18	13	13	2		
02955	70	(2/0)	14	9/16"	16	28	42	18	13	15	2		
04137	95	(3/0)	8	5/16"	18	24	42	20	15	8,4	2,5		
04143	95	(3/0)	10	3/8"	18	24	42	20	15	10,5	2,5		
04149	95	(3/0)	12	1/2"	18	24	42	20	15	13	2,5		
04155	95	(3/0)	14	9/16"	18	28	44	20	15	15	2,5		
04161	95	(3/0)	16	5/8"	18	28	44	20	15	17	2,5		
04243	120	(4/0)	10	3/8"	20	24	44	22	16,5	10,5	3	25/25	
04249	120	(4/0)	12	1/2"	20	24	44	22	16,5	13	3		
04255	120	(4/0)	14	9/16"	20	28	48	22	16,5	15	3		
04261	120	(4/0)	16	5/8"	20	28	48	22	16,5	17	3		
04267	120	(4/0)	20	3/4"	20	32	53	22	16,5	21	3		
04343	150	(300)	10	3/8"	22	30	50	24	19	10,5	3,2		
04349	150	(300)	12	1/2"	22	30	50	24	19	13	3,2		
04361	150	(300)	16	5/8"	22	30	50	24	19	17	3,2		