



## Technical sheet

No.

**12GB01A**

Issue

**V02.0****Product family:**

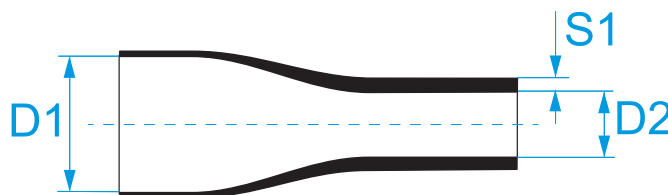
Cable protection - Thermo shrinking cable protection

**Item code:**

GBA030SNE, GBA060SNE, GBA090SNE, GBA120SNE, GBA190SNE, GBA240SNE

**Description:**

THERMO SHRINKING CABLE PROTECTION · THIN WALL 3:1 WITH ADHESIVE · BAR

**Image****Technical drawing****Specifications****TYPE:**

double wall with adhesive

**SHRINKAGE RATIO:**

3:1

**MATERIAL:**

polyethylene

**OPERATING TEMPERATURE:**

from -55°C to +125°C max

**SHRINKAGE TEMPERATURE:**

from +70°C to +125°C

**VRMS MAX:**

600 V

**SHEATH SELF-EXTINGUISHING GRADE:**

UL 224 VW-1

**APPLICATIONS:**

superior insulation, watertightness and protection of connections and terminals in various industries, including electronics, automotive, railway and marine.

Code	Size (mm)	Length (m)		Color	D1 (Ø mm)	D2 (Ø mm)	S1 (mm)	
GBA030SNE	3	1	■	Black	3,0	1,0	1,00	25/25
GBA060SNE	6	1	■	Black	6,0	2,0	1,00	10/10
GBA090SNE	9	1	■	Black	9,0	3,0	1,35	10/10
GBA120SNE	12	1	■	Black	12,0	4,0	1,65	10/10
GBA190SNE	19	1	■	Black	19,0	6,4	2,10	10/10
GBA240SNE	24	1	■	Black	24,0	8,0	2,35	10/10



file n° E245489

**FLAME**  
RETARDANT**3:1**