BM GROUP	**Technical sheet**	**No.** 41MA02B **Issue** V01.2

Product family:	Terminal blocks - Multiway in nylon
Item code:	N9201CS1, N9201CS2, N9201CS3, N9201CS4, N9201CS5, N9201CS6, N9201CS7, N9201CS8, N9201CS9, N9201CS10, N9201CS11, N9201CS
Description:	MULTIWAY TERMINAL BLOCKS · NYLON · FROM 1 TO 12 WAYS · N9201 SERIES WITH WIRE PROTECTION

Image

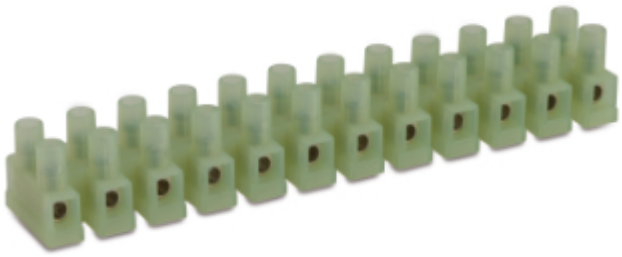

Technical drawing

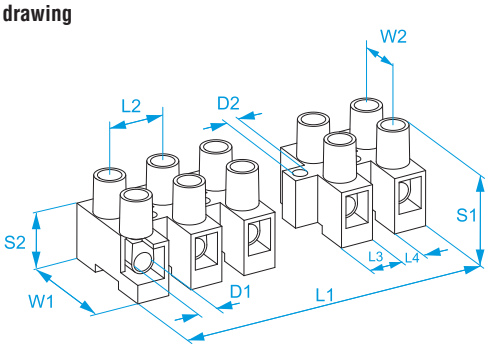

Wire protection version of the N9201 series

Specifications

INSULATING HOUSING:	polyamide (PA 6.6) natural color UL 94 V2
CONDUCTIVE BODY:	nickel-plated brass
CAPTIVE SCREW IN:	galvanized steel (M3)
WIRE PROTECTION:	stainless steel
INSULATION SELF-EXTINGUISHING:	EN 60695-2-10 a 850 °C
CONDUCTOR TYPE:	rigid and flexible
MAX OPERATING TEMPERATURE:	125 °C
MAX SHORT-TIME TEMPERATURE:	160 °C
TEST VOLTAGE:	2500 V
PROTECTION GRADE:	IP20
ACCORDING TO STD.:	EN 60998-1: 2004, EN 60998-2-1: 2004

	Section (mm²)	Section (AWG)	Rated voltage (V)	Test current (A)	Max operating temperature (°C)	Torque (Nm)
EK 03	2,5	-	400	24	125	0,25
c UL us	-	18-14	600	15 (**)	115	0,5

** 25 A rated for Factory Wiring Only

Code	L1 (mm)	L2 (mm)	L3 (mm)	L4 (mm)	W1 (mm)	W2 (mm)	S1 (mm)	S2 (mm)	D1 (mm)	D2 (mm)	
N9201CS1	6	10	6,8	3,1	20,2	10	17,2	9,8	3,1	3,1	
N9201CS2	16	10	6,8	3,1	20,2	10	17,2	9,8	3,1	3,1	
N9201CS3	26	10	6,8	3,1	20,2	10	17,2	9,8	3,1	3,1	
N9201CS4	36	10	6,8	3,1	20,2	10	17,2	9,8	3,1	3,1	
N9201CS5	46	10	6,8	3,1	20,2	10	17,2	9,8	3,1	3,1	
N9201CS6	56	10	6,8	3,1	20,2	10	17,2	9,8	3,1	3,1	Contact BM
N9201CS7	66	10	6,8	3,1	20,2	10	17,2	9,8	3,1	3,1	
N9201CS8	76	10	6,8	3,1	20,2	10	17,2	9,8	3,1	3,1	
N9201CS9	86	10	6,8	3,1	20,2	10	17,2	9,8	3,1	3,1	
N9201CS10	96	10	6,8	3,1	20,2	10	17,2	9,8	3,1	3,1	
N9201CS11	106	10	6,8	3,1	20,2	10	17,2	9,8	3,1	3,1	
N9201CS	116,5	10	6,8	3,1	20,2	10	17,2	9,8	3,1	3,1	50/500

CE

EK 03 c UL us

HALOGEN FREE