BM GROUP	**Technical sheet**	**No.** 41MA02C **Issue** V01.2

Product family:	Terminal blocks - Multiway in nylon
Item code:	N9202/1, N9202/2, N9202/3, N9202/4, N9202/5, N9202/6, N9202/7, N9202/8, N9202/9, N9202/10, N9202/11, N9202
Description:	MULTIWAY TERMINAL BLOCKS · NYLON · FROM 1 TO 12 WAYS · N9202 SERIES

Image

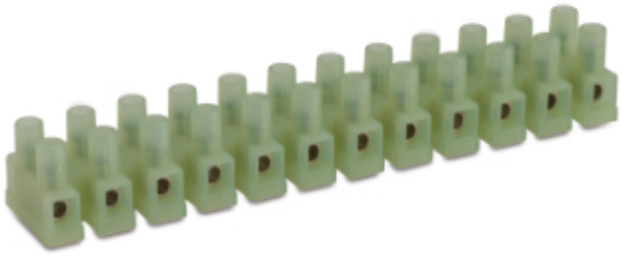

Technical drawing

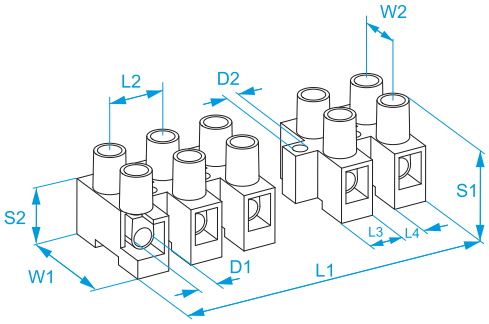

Standard version of the N9202 series

Specifications

INSULATING HOUSING:	polyamide (PA 6.6) natural color UL 94 V2
CONDUCTIVE BODY:	nickel-plated brass
CAPTIVE SCREW IN:	galvanized steel (M3,5)
INSULATION SELF-EXTINGUISHING:	EN 60695-2-10 a 850 °C
CONDUCTOR TYPE:	rigid and flexible
MAX OPERATING TEMPERATURE:	125 °C
MAX SHORT-TIME TEMPERATURE:	160 °C
TEST VOLTAGE:	2500 V
PROTECTION GRADE:	IP20
ACCORDING TO STD.:	EN 60998-1: 2004, EN 60998-2-1: 2004

	Section (mm²)	Section (AWG)	Rated voltage (V)	Test current (A)	Max operating temperature (°C)	Torque (Nm)
EK 03	6	10	400	41	125	0,4

Code	L1 (mm)	L2 (mm)	L3 (mm)	L4 (mm)	W1 (mm)	W2 (mm)	S1 (mm)	S2 (mm)	D1 (mm)	D2 (mm)	
N9202/1	7,5	12	7,4	4,5	23	10	20,1	11,9	4,2	3,6	
N9202/2	19,5	12	7,4	4,5	23	10	20,1	11,9	4,2	3,6	
N9202/3	31,5	12	7,4	4,5	23	10	20,1	11,9	4,2	3,6	
N9202/4	43,5	12	7,4	4,5	23	10	20,1	11,9	4,2	3,6	
N9202/5	55,5	12	7,4	4,5	23	10	20,1	11,9	4,2	3,6	
N9202/6	67	12	7,4	4,5	23	10	20,1	11,9	4,2	3,6	Contact BM
N9202/7	79	12	7,4	4,5	23	10	20,1	11,9	4,2	3,6	
N9202/8	91	12	7,4	4,5	23	10	20,1	11,9	4,2	3,6	
N9202/9	103	12	7,4	4,5	23	10	20,1	11,9	4,2	3,6	
N9202/10	115	12	7,4	4,5	23	10	20,1	11,9	4,2	3,6	
N9202/11	127	12	7,4	4,5	23	10	20,1	11,9	4,2	3,6	
N9202	139,5	12	7,4	4,5	23	10	20,1	11,9	4,2	3,6	10/50

CE

EK 03

HALOGEN FREE