

Product family: Terminal blocks - Multiway in nylon


Item code: 95CS1, 95CS2, 95CS3, 95CS4, 95CS5, 95CS6, 95CS7, 95CS8, 95CS9, 95CS10, 95CS11, M95CS

Description: MULTIWAY TERMINAL BLOCKS · NYLON · FROM 1 TO 12 WAYS · M095 SERIES WITH WIRE PROTECTION

Image



Technical drawing

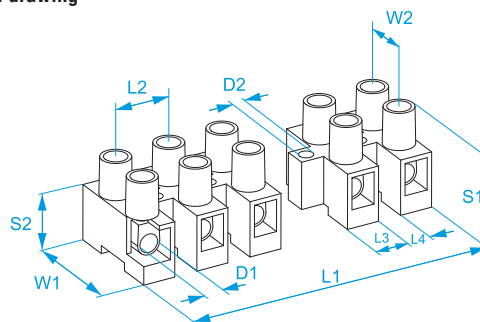

Specifications

INSULATING HOUSING: polyamide (PA 6.6) natural color UL 94 V2

CONDUCTIVE BODY: nickel-plated brass

CAPTIVE SCREW IN: galvanized steel (M4)

WIRE PROTECTION: stainless steel

INSULATION SELF-EXTINGUISHING: EN 60695-2-10 a 850 °C

CONDUCTOR TYPE: rigid and flexible

TEST VOLTAGE: 2500 V

PROTECTION GRADE: IP20

ACCORDING TO STD.: EN 60998-1: 2004, EN 60998-2-1: 2004

	Section (mm ²)	Section (AWG)	Rated voltage (V)	Test current (A)	Max operating temperature (°C)	Torque (Nm)
	6	-	400	41	125	0,7
	-	18-8	600	50	105	1,2

Code	Color	L1 (mm)	L2 (mm)	L3 (mm)	L4 (mm)	W1 (mm)	W2 (mm)	S1 (mm)	S2 (mm)	D1 (mm)	D2 (mm)	
95CS1	Natural	9,5 ± 1	15	9,4	5,6	25,3	11	25,7	15,7	5	4,2	
95CS2	Natural	24,5 ± 1	15	9,4	5,6	25,3	11	25,7	15,7	5	4,2	
95CS3	Natural	39 ± 1	15	9,4	5,6	25,3	11	25,7	15,7	5	4,2	
95CS4	Natural	54,5 ± 1	15	9,4	5,6	25,3	11	25,7	15,7	5	4,2	
95CS5	Natural	69,5 ± 1	15	9,4	5,6	25,3	11	25,7	15,7	5	4,2	
95CS6	Natural	84 ± 1	15	9,4	5,6	25,3	11	25,7	15,7	5	4,2	Contact BM
95CS7	Natural	99 ± 1	15	9,4	5,6	25,3	11	25,7	15,7	5	4,2	
95CS8	Natural	114,5 ± 1	15	9,4	5,6	25,3	11	25,7	15,7	5	4,2	
95CS9	Natural	129,5 ± 1	15	9,4	5,6	25,3	11	25,7	15,7	5	4,2	
95CS10	Natural	145 ± 1	15	9,4	5,6	25,3	11	25,7	15,7	5	4,2	
95CS11	Natural	160,2 ± 1	15	9,4	5,6	25,3	11	25,7	15,7	5	4,2	
M95CS	Natural	174 ± 1	15	9,4	5,6	25,3	11	25,7	15,7	5	4,2	10/10

