

Product family: Terminal blocks - For free connections


Item code: 9924CS, 993CS, 994CS

Description: ONE-WAY TERMINAL BLOCKS · END CONNECTORS · BARS · WITH INDIRECT CLAMPING

Image



Technical drawing

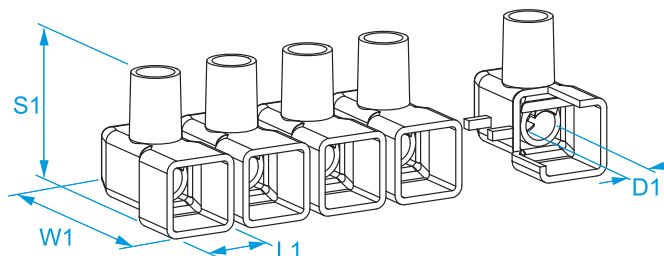

Specifications

INSULATING HOUSING: transparent polycarbonate (PC) UL 94 V0

CONDUCTIVE BODY: brass

WIRE PROTECTION: stainless steel

CAPTIVE SCREW IN: galvanized steel

INSULATION SELF-EXTINGUISHING: EN 60335-1: 2002+A2:2006 (par. 30.2.3), EN 60695-2-10 a 850 °C, EN 60695-2-11

CONDUCTOR TYPE: rigid and flexible

MAX OPERATING TEMPERATURE: 85 °C

PROTECTION GRADE: IP20

ACCORDING TO STD.: EN 60998-1: 2004, EN 60998-2-1: 2004

Code	Conductor section (mm ²)	Connection capability Section (mm ²)	Connection capability N. rigid conductors	Connection capability N. flexible conductors	Rated voltage (V)	Test current (A)	Screw	D1 (mm)	L1 (mm)	W1 (mm)	S1 (mm)		
9924CS	4	4	2	2	450	32	M4	4,5	10,3	21	20	10	10/400
		2.5	2 ÷ 3	2 ÷ 3									
		1.5	2 ÷ 4	2 ÷ 4									
		1	2 ÷ 5	2 ÷ 5									
		0.75	2 ÷ 6	2 ÷ 6									
		0.5	2 ÷ 10	2 ÷ 10									
993CS	6	6	2	2	450	41	M4	6	11,8	22,5	23	10	10/300
		4	2 ÷ 3	2 ÷ 3									
		2.5	2 ÷ 4	2 ÷ 4									
		1.5	2 ÷ 6	2 ÷ 6									
		1	2 ÷ 8	2 ÷ 8									
		0.75	2 ÷ 10	2 ÷ 10									
0.5	2 ÷ 12	2 ÷ 12											
994CS	10	10	2	2	450	57	M6	7,9	14,7	26	26	10	10/200
		6	2 ÷ 3	2 ÷ 3									
		4	2 ÷ 5	2 ÷ 5									
		2.5	2 ÷ 8	2 ÷ 8									
		1.5	2 ÷ 12	2 ÷ 12									
		1	2 ÷ 15	2 ÷ 15									
0.75	2 ÷ 15	2 ÷ 15											