BM GROUP	**Technical sheet**	**No.** 41MB05A **Issue** V01.1

Product family:	Terminal blocks - One-way
Item code:	9981, 9983
Description:	ONE-WAY TERMINAL BLOCKS · 6 INPUTS

Image

Technical drawing

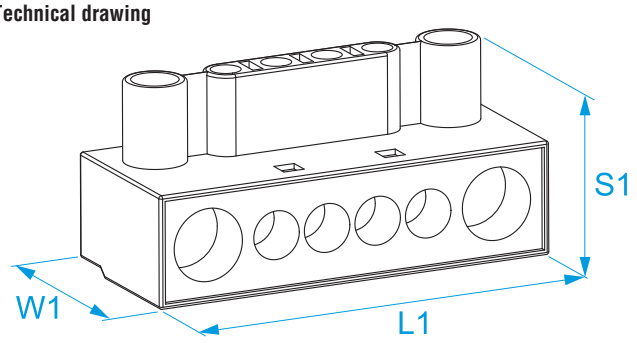

Specifications

INSULATING HOUSING:	transparent polycarbonate (PC) UL 94 V0
CONDUCTIVE BODY:	brass
SCREW IN:	galvanized steel
INSULATION SELF-EXTINGUISHING:	EN 60335-1: 2002+A2:2006 (par. 30.2.3), EN 60695-2-10 a 850 °C, EN 60695-2-11
CONDUCTOR TYPE:	rigid and flexible
MAX OPERATING TEMPERATURE:	85 °C
PROTECTION GRADE:	IP20
ACCORDING TO STD.:	EN 60998-1: 2004, EN 60998-2-1: 2004

Code	Conductor section (mm²)	Rated voltage (V)	Test current (A)	Inputs	Stripping length (mm)	Screw	L1 (mm)	W1 (mm)	S1 (mm)	
9981	(2,5 ÷ 6) x 4	750	40	6	11	M4	48	24	26	25/25
9983	(6 ÷ 16) x 4	750	125	6	16	M5,	77	35	35	25/25

CE UKCA

HALOGEN FREE