

Product family: Terminal blocks - Indirect clamping terminal


Item code: 95261, 95262, 95263, 95264

Description: INDIRECT CLAMPING TERMINAL BLOCK · TWIN BLOCK

Image



Technical drawing

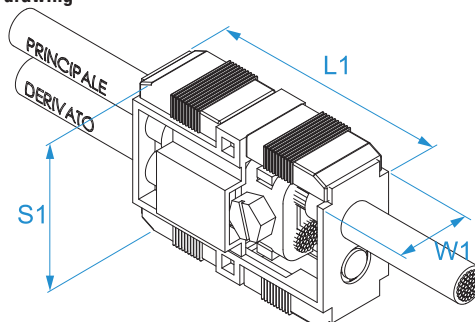

Specifications

INSULATING HOUSING: transparent polycarbonate (PC) UL 94 V0

CONDUCTIVE BODY: nickel-plated die-cast brass

SAFETY CLIP IN: black polyamide (PA 6.6)

SCREW IN: galvanized steel

MAX OPERATING TEMPERATURE: 85 °C

CLAMPING TYPE: indirect

TEST VOLTAGE: 2500 V

PROTECTION GRADE: IP20

ACCORDING TO STD.: EN 60947-7-1, EN 60998-1: 2004, EN 60998-2-1: 2004, EN 60999

Code	Conductor section (mm ²)	Connectable flexible conductors Primary (mm ²)	Connectable flexible conductors Derivative (mm ²)	Rated voltage (V)	L1 (mm)	W1 (mm)	S1 (mm)	
95261	10-25	25	25	450	64	27	43	1/10
95262	25-50	50	50	450	71	34	49	1/10
95263	50-95	95	95	450	77	41	61	1/10
95264	70-120	120	120	450	90	50	72	1/5

