BM GROUP	**Technical sheet**	**No.** 11TB04C **Issue** V01.3

Product family: Terminals - Insulated tube terminals

Item code: 917313, 918313, 918433, 919313, 919433, 931373, 931433, 932373, 932433, 933373, 933433, 934493, 935493

Description: TERMINAL LUGS FOR COPPER CONDUCTORS · NYLON INSULATED · BLACK · SMALL PLATE

Image

Technical drawing

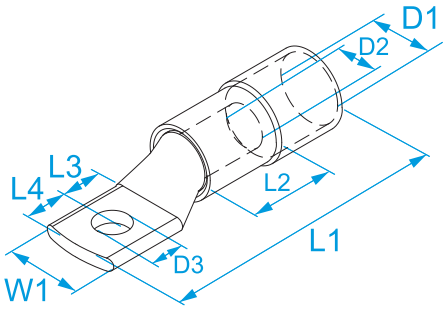

Specifications

TERMINAL MATERIAL:	tinned copper
INSULATION MATERIAL:	polyamide (PA 6.6)
INSULATION SELF-EXTINGUISHING GRADE:	UL 94 V0
OPERATING TEMPERATURE:	125 °C max
APPLICATIONS:	the reduced width of the palm allows connection to equipment with lugs of dimensions not suitable for standard terminals.

Code	Color	Section (mm²)	Section (AWG/kcmil)	For screw Ø screw (mm)	For screw Stud size	W1 (mm)	L1 (mm)	L2 (mm)	L3 (mm)	L4 (mm)	D1 (mm)	D2 (mm)	D3 (mm)	
917313	Black	35	(2)	6	#12	15	55	16	8	7	14	8,5	6,5	
918313	Black	50	(1/0)	6	#12	15	58	18	8	7	15,5	10	6,5	
918433	Black	50	(1/0)	10	3/8"	18,5	66,5	18	13,5	9,5	15,5	10	10,5	
919313	Black	70	(2/0)	6	#12	17	68	20	9,5	6,5	18	12	6,5	
919433	Black	70	(2/0)	10	3/8"	19	74	21	13	10	18	12	10,5	
931373	Black	95	(3/0)	8	5/16"	19	76,5	24	12	8	19,5	13,8	8,5	
931433	Black	95	(3/0)	10	3/8"	19	80,5	22	13	10	19,5	13,8	10,5	25/25
932373	Black	120	(4/0)	8	5/16"	19	83	22	12	9	21	15,5	8,5	
932433	Black	120	(4/0)	10	3/8"	19	83	22	12	9	21	15,5	10,5	
933373	Black	150	(300)	8	5/16"	19	93,5	30	17	9	23	17	8,4	
933433	Black	150	(300)	10	3/8"	19	93,5	30	17	9	23	17	10,5	
934493	Black	185	(400)	12	1/2"	31	110	32	17	14	26	19	13	
935493	Black	240	(500)	12	1/2"	31,5	119	39	17	14	30	21,5	13	

HALOGEN FREE · 125 °C · V0