Technical sheet

No. **11TE01B**

Issue **V01.0**

Product family: Terminals - Insulated quick-connect terminals

Item code: 00130, 00230, 00234, 00330

Description: CYLINDER PLUG · PVC INSULATED AND ANTI-VIBRATING · MALE

Image

Technical drawing

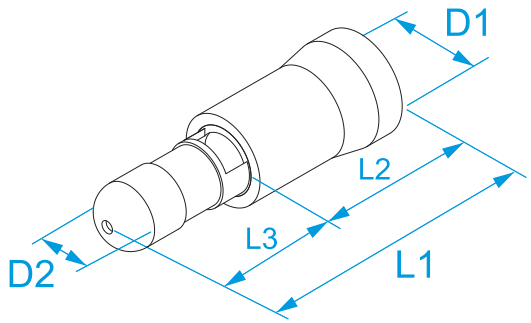

Specifications

TERMINAL MATERIAL:	tinned brass
END-SLEEVE MATERIAL:	copper
INSULATION MATERIAL:	polyvinylchloride (PVC)
OPERATING TEMPERATURE:	75 °C max
INSULATION SELF-EXTINGUISHING GRADE:	UL 94 V0
RATED VOLTAGE:	300V max
HOW TO ASSEMBLE:	double crimping

Code	Color	Section (mm²)	Section (AWG)	L1 (mm)	L2 (mm)	L3 (mm)	D1 (mm)	D2 (mm)	
00130*	Red	0.25 ÷ 1.5	(22 - 16)	21	10	8,7	5,5	4	100/1000
00230*	Blue	1.5 ÷ 2.5	(16 - 14)	21	10	8,7	6	5	100/1000
00234*	Blue	1.5 ÷ 2.5	(16 - 14)	20,7	10	8,7	6	4	
00330	Yellow	4 ÷ 6	(12 - 10)	24,7	14	8,6	6,7	5	50/500

c UL us * file n° E 137735

V0

EASYENTRY