



Technical sheet

No.

22PA03E

Issue

V01.1

Product family:

Nylon cable glands - PG thread

Item code:

4007S, 4007SN, 4009S, 4009SN, 4011S, 4011SN, 4013S, 4013SN, 4016S, 4016SN, 4021S, 4021SN


Description:

NYLON CABLE GLANDS · PG THREAD · IP68 · WITH SPIRAL CABLE PROTECTION

Image



Technical drawing

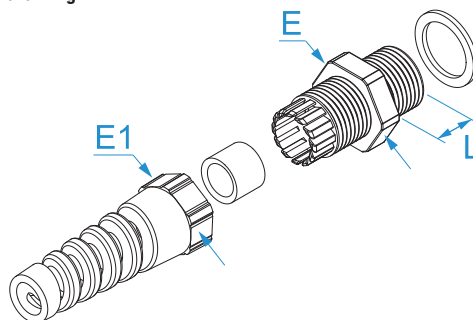

Specifications

MATERIAL:

polyamide (PA 6.6), self-extinguishing according to UL 94 V2 and IEC 695-2-1 (850 °C)

OPERATING TEMPERATURE:

from -20 °C to +90 °C

INNER GASKET AND WASHER:

NBR (nitrile rubber), 70 Shore A

ACCORDING TO STD.:

EN 62444:2013

ASSEMBLY:

do not remove or move the gasket; tighten on a flat and smooth surface.

Code	Color	PG thread size (DIN40430)	Ø cable (mm)	L (mm)	E wrench (nut)	
4007S	Grey RAL 7035	PG 7	3 - 6,5	15	16	25/25
4007SN	Black RAL 9005	PG 7	3 - 6,5	15	16	
4009S	Grey RAL 7035	PG 9	4 - 8	15	19	25/25
4009SN	Black RAL 9005	PG 9	4 - 8	15	19	
4011S	Grey RAL 7035	PG 11	5 - 10	15	22	10/10
4011SN	Black RAL 9005	PG 11	5 - 10	15	22	
4013S	Grey RAL 7035	PG 13.5	6 - 11	15	24	10/10
4013SN	Black RAL 9005	PG 13.5	6 - 11	15	24	
4016S	Grey RAL 7035	PG 16	10 - 13	15	27	10/100
4016SN	Black RAL 9005	PG 16	10 - 13	15	27	
4021S	Grey RAL 7035	PG 21	13 - 16	15	33	10/10
4021SN	Black RAL 9005	PG 21	13 - 16	15	33	



**HALOGEN
FREE**

IP68